

Produto | Product



Sistema termostático embutido de banheira com chuveiro de parede Ø250 mm, kit de chuveiro mão e bica de banheira - VenusQ |
Thermostatic concealed bath-shower set with shower head Ø250 mm, handshower set and bath spout - VenusQ

187 350 1XX

IMAGEM* | IMAGE*



DESENHO DIMENSIONAL | DIMENSIONAL DRAWING

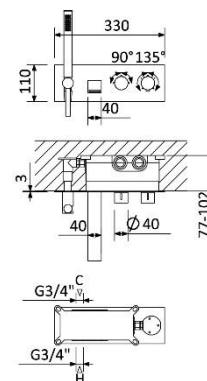

ESPECIFICAÇÕES | SPECIFICATIONS

- Sistema termostático embutido de banheira com chuveiro de parede Ø250 mm, kit de chuveiro mão e bica de banheira - VenusQ;
- Cartucho termostático;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®;
- Limitador de temperatura a 38°C;
- Com elemento encastrável INT 640 2NO.

- Thermostatic concealed bath-shower set with shower head Ø250 mm, handshower set and bath spout - VenusQ;
- Thermostatic compact cartridge;
- Water-saving technology BRUMA AirEcoDrop®;
- Anti-limescale system BRUMA ConfortClean®;
- Safety stop limits the temperature range to 38 °C;
- With concealed body INT 640 2NO.




DIAGRAMA CAUDAL | FLOW DIAGRAM

Caudais a 3 bar:

- Saída 1 (chuveiro de mão): 13,2 l/min.
- Saída 2 (bica de banheira): 9,70 l/min
- Saída 3 (chuveiro de parede): 9,9 l/min.

Flow rate at 3 bar:

- Outlet 1 (handshower): 13,2 l/min.
- Outlet 2 (bath spout): 9,70 l/min.
- Outlet 3 (shower head): 9,9 l/min.

INSTRUÇÕES DE MANUTENÇÃO | MAINTENANCE INSTRUCTIONS




Product


Elemento encastrável | *Concealed body*

INT 640 2NO

IMAGEM | IMAGE

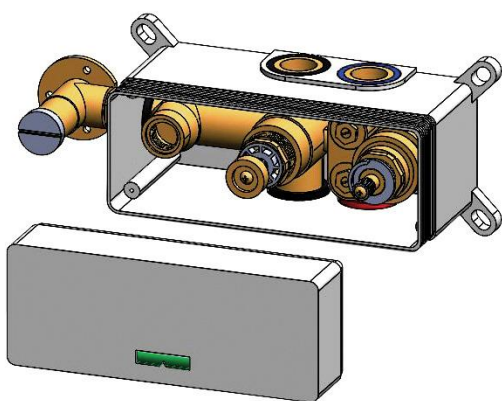

DESENHO DIMENSIONAL | DIMENSIONAL DRAWING

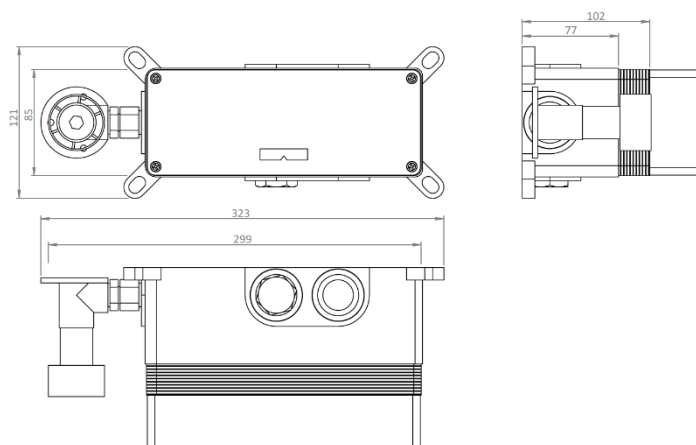

ESPECIFICAÇÕES | SPECIFICATIONS

- Elemento encastrável;
- Cartucho termostático com elemento sensível Vernet;
- Cartucho inversor de discos cerâmicos;
- Inclui parafusos e buchas para fixação.

- *Concealed body;*
- *Thermostatic cartridge with Vernet sensitive element;*
- *diverter cartridge with ceramic discs;*
- *Screws and plugs included.*

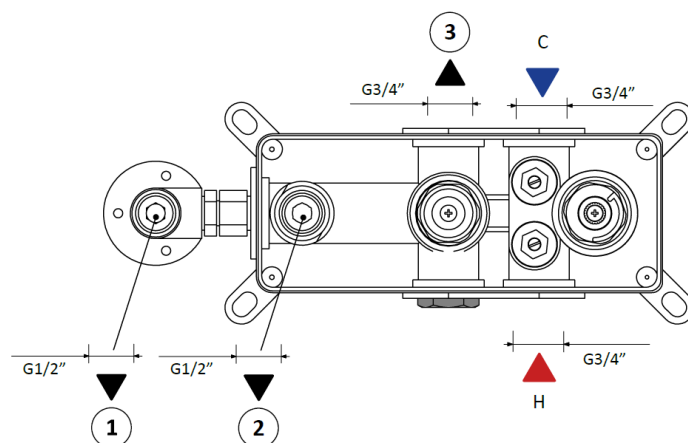


DIAGRAMA CAUDAL | FLOW DIAGRAM


Caudais a 3 bar:

- Saída 1 (sem restrição): 24,70 l/min
- Saída 2 (sem restrição): 26,30 l/min
- Saída 3 (sem restrição): 24,70 l/min.

Flow rate at 3 bar:

- Outlet 1 (without restrictor): 24,70 l/min.
- Outlet 2 (without restrictor): 26,30 l/min.
- Outlet 3 (without restrictor): 24,70 l/min.

Inversor
Diverter



Termostático
Thermostatic

